



<b>Identification</b>	Type	LCIS-RGA24UP-S-1U
	Part-No.	760021.0000

**Input**

Input voltage range	19.2 V – 30.0 V
Nominal voltage	AC/DC 24 V
Rated current	13.0 mA
Interrupting voltage	<2.4 V
Max. length of connecting lead	DC 1000 m / AC 500 m

**Load Side**

Contact type	1 change over contact
Min. switching voltage	AC/DC 17 V
Max. switching voltage	AC/DC 250 V
Min. switching current	AC/DC 5 mA
Max. switching current	AC/DC 6 A
Switching capacity AC 15	3 A
Switching capacity DC 13	at 24 V: 1 A, at 125 V: 200 mA, at 250 V: 100 mA
Max. switching capacity	1500 VA
Contact material	AgSnO <sub>2</sub>
Mechanical service life	> 5 × 10 <sup>7</sup> operations
Switch-on delay	5 ms
Switch-off delay	10 ms

26.05.2015 – Subject to technical modification

Part-No. 760021.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk



## Technical data sheet • Interface Technology

---

Clearance/creep. dist.  
(control/load side) >5.5 mm

---

### General

---

Housing material	PA 6.6 (UL 94 V-0)
Protection class	IP 20
Field installation	rail TS 35 (EN 60175)
Insulation voltage input/output	4.0 kV <sub>eff</sub>
Safe isolation	yes
Rated insulation voltage (EN 50178)	300 V
Operation temperature range	-25 °C – 60 °C
Storage temperature range	-40 °C – 80 °C
Dimensions (w x h x d)	6.2 x 93.0 x 73.0 mm
Weight (kg/piece)	0.035
Approvals	UL, CSA, GL in preparation
Termination	Screw terminal: solid 0.25 – 2.0 mm <sup>2</sup> / AWG 20 – 14 fine stranded with ferrule 0.25 – 1.5 mm <sup>2</sup> / AWG 20 – 16 Stripping length: 8 mm Screw driver: 3.5 x 0.5 mm
Installation position	Optional

26.05.2015 – Subject to technical modification

Part-No. 760021.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Dimensions

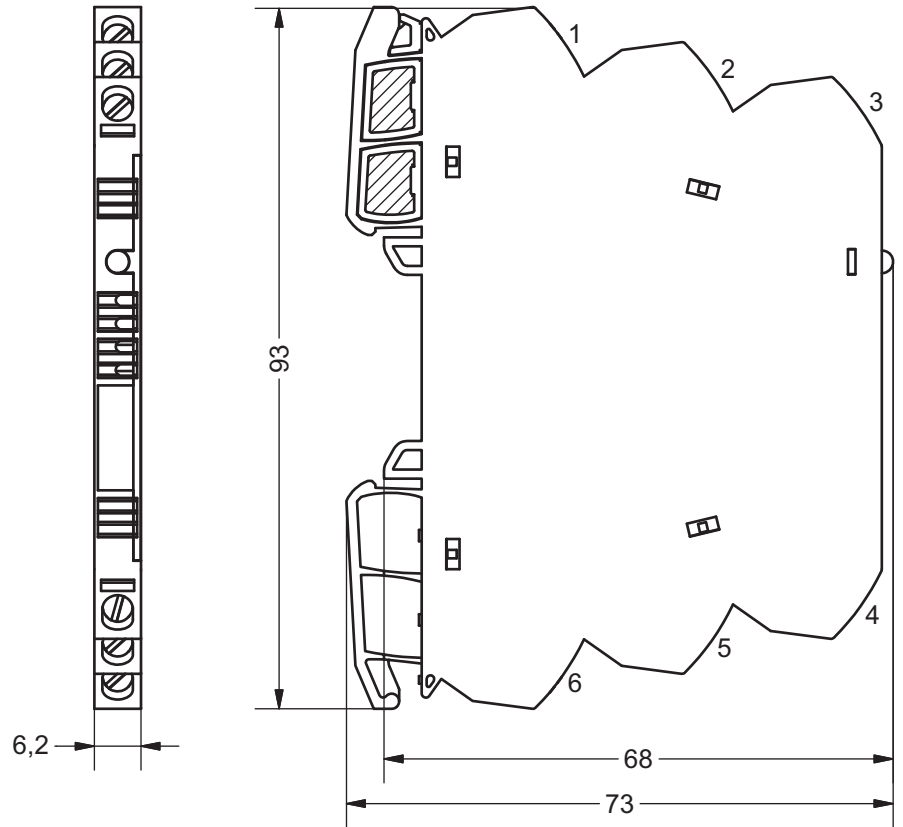

PIN assignment

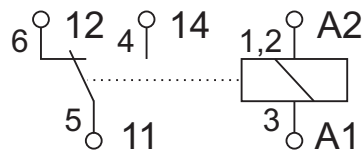

26.05.2015 – Subject to technical modification

Part-No. 760021.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk